


VIRAZON LED 15W, ceiling light with motion sensor 1050lm, IP44, 4000K, milky PC, white

Marka: **ADVITI** | Symbol: **AD-PL-6064WLPMR4** | Ean: **5908254817618**

Adviti

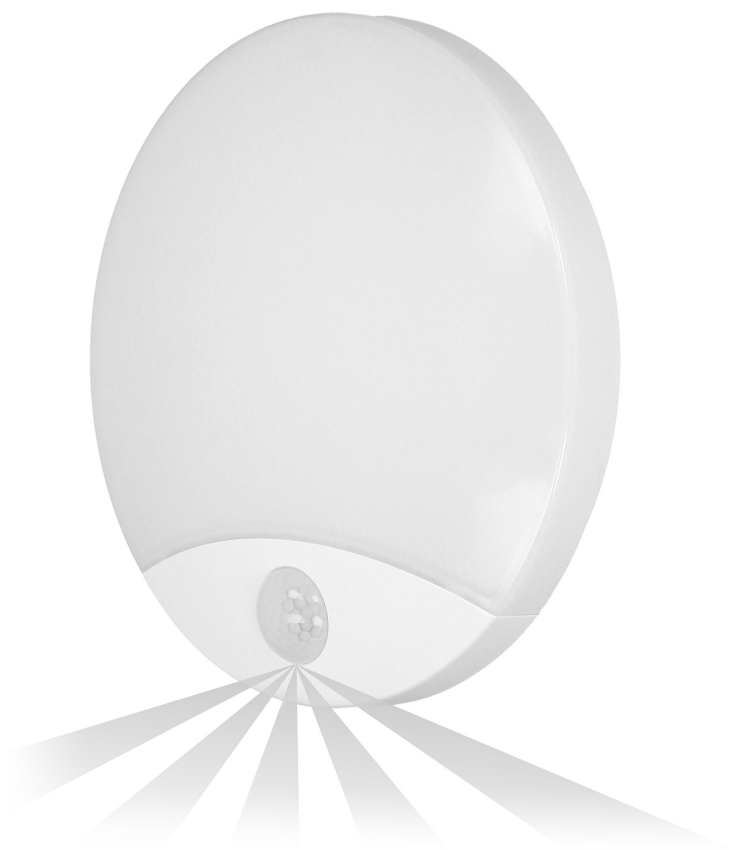

PRODUCT DESCRIPTION

The ceiling lamp is designed to automatically illuminate rooms such as: staircases, corridors, basements, garages, warehouses, etc. This lighting fixture has a meatly built-in PIR motion sensor, which is placed inside and, depending on the settings, will detect even the smallest movement. Thanks to the two potentiometers, the sensor can be set according to the needs so as to operate exactly when people are present and moving in a given area. The settings include: lighting time in the range from 10 seconds to 5 minutes and light intensity. The maximum range of motion detection is 9 m. The luminaire usse SMD LED diodes, which guarantee high

energy efficiency and have a long service life. The presented lamp works with rated power of 15 W and emits light with luminous flux of 1050 lm. It shines with a natural white color at a temperature of 4000K. The ceiling fixture is entirely made of unbreakable polycarbonate. The lampshade is in milky color. The IP44 ingress protection class guarantees sufficient protection against dust particles and water splashing from any angle. This makes the ceiling lamp a safe solution for outdoor installation, for example on building facades. The product is available in white.

TECHNICAL DATA

General information:

Luminous flux:	1050 lm
Rated power:	15 W
Light source:	LED SMD
Degree of protection (IP):	44
Colour temperature:	4000
Nominal voltage:	230V~, 50Hz
Colour:	white
Dimensions - depth:	49 mm
Dimensions - width:	250 mm
Dimensions - height:	250 mm
Colour rendering index CRI:	>85
Detection angle:	160°
Material of the lampshade:	polycarbonate
Control of the motion sensor:	Yes
Type of sensor:	PIR
Detection range:	9 m
Adjustable daylight sensor (LUX):	Yes
Daylight sensor adjustment range (LUX):	<3–2000lux
Adjustable time setting (TIME):	Yes
Lighting time adjustment range (TIME):	min: 10 sek. ± 3 sek.; max: 5 min. ± 1 min.
Adjustment of motion detection range (SENS):	No



