Power distribution block 125A, input terminal 1x16mm² and 1x35mm², output terminals 6x16mm².

Marka: **Orno** | Symbol: **OR-LZ-8207/125** | Ean: **5908254828898**



PRODUCT DESCRIPTION

Power distribution blocks, suitable for DIN rail or mounting on a plate, help to connect heavy section cables. These blocks are used in electric switchboards and industrial casings for energy distribution.

ORNO GROUP Sp. z o. o. All rights reserved.

TECHNICAL DATA

General information:

Type:	distribution block
Input screw terminals:	1x 6-16; 1x 10-35mm²
Current:	80 A
Output terminals:	6x 2,5-16 mm²
Degree of protection (IP):	20
Insulation voltage Ui acc. to IEC:	1000 V
Insulation voltage Ui acc. to UL:	600 V
Rated short-time withstand current Icw:	4.2 kA
Peak short-circuit withstand current Ipk:	30 kA
Colour:	blue
Possibility of extension:	Yes
Dimensions - depth:	77 mm
Dimensions - height:	46 mm
Screw tightening torque:	Input: 3,5 ; 8,5 Output: 3,5 Nm

ORNO GROUP Sp. z o. o. All rights reserved.










ORNO GROUP Sp. z o. o. All rights reserved.

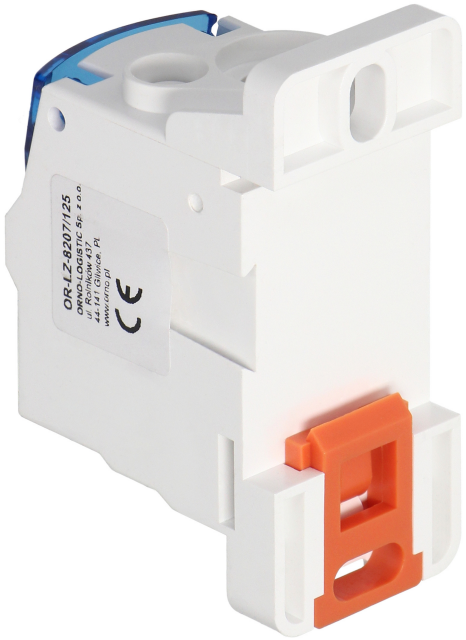

ORNO GROUP Sp. z o. o. All rights reserved.